


[openvpn](#), [pfsense](#), [sitetosite](#), [vpn](#), [apu1c4](#), [pcengines](#)

simple site to site VPN with pfSense and OpenVPN

I just had to set up a simple site to site VPN between a site with a fixed IP (SITE-B) and a site with a dynamic IP (SITE-A). Both routers are running the 'Community Edition' of pfSense and are installed on PC Engines APU.1C4. I have followed the documentation at pfsense.org about how to [configure a Site To Site VPN with OpenVPN](#) to get the VPN up and running. Because some things aren't documented there I will put up my own HowTo here. Please do yourself a favour and read the [documentation at pfsense.org](#) first because it explains things in more detail than I will do here.

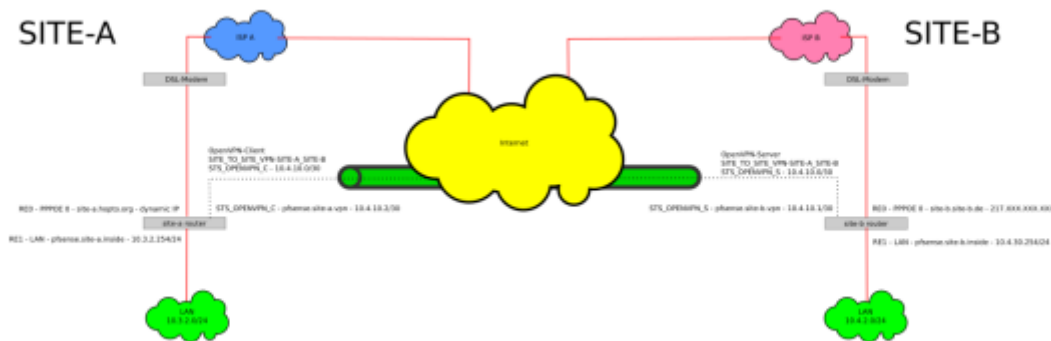

This HowTo will guide you through the setup of:


- An IPv4 'Site To Site VPN' with [OpenVPN](#) on the pfSense platform (2.3.4 at time of writing) as seen in the schema above with the specific settings for the PC Engines APU hardware platform.
- The client will autoconnect to the server and (in the event of disconnection) reconnect automatically.
- The authentication between the client and the server will happen automatically via pre-shared key.

Sources

- [pfsense.org - OpenVPN Site To Site](#)
- [The pfSense Book](#)

Configure the OpenVPN server on SITE-B router

- Navigate to 'VPN - OpenVPN'

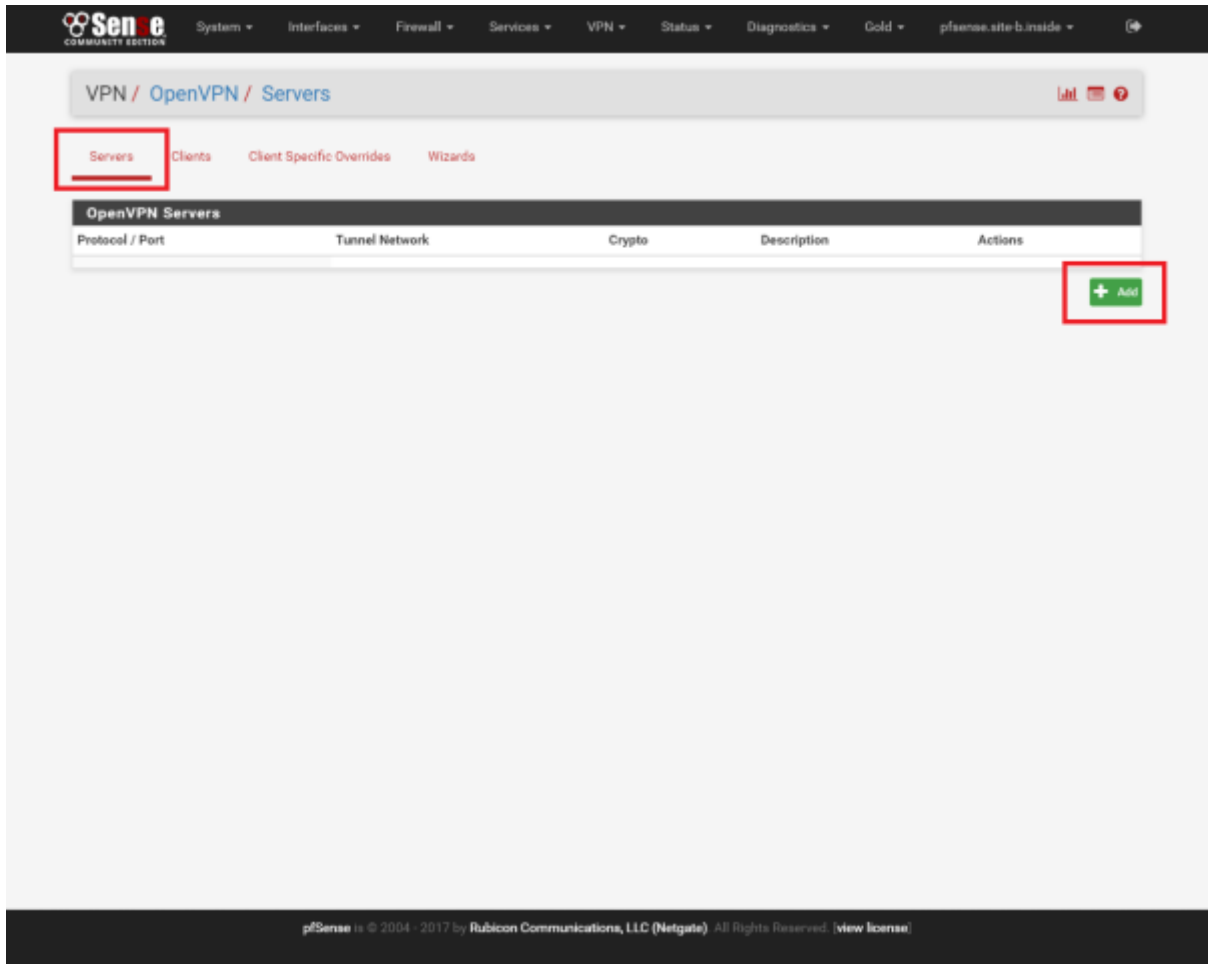

- On the '**Servers**'-Tab click on the '**+ Add**'-button to add a new server

OpenVPN / Servers / Edit

Servers Clients Client Specific Overrides Wizards

General Information

Disabled Disable this server
Set this option to disable this server without removing it from the list.

Server mode Peer to Peer (Shared Key)

Protocol UDP

Device mode tun

Interface WAN

Local port 1194

Description Site_To_Site-SITE-A_SITE_B
A description may be entered here for administrative reference (not parsed).

Cryptographic Settings

Shared key Automatically generate a shared key

Encryption Algorithm AES-256-CBC (256 bit key, 128 bit block)

Auth digest algorithm RSA-SHA512 (512-bit)
Leave this set to SHA1 unless all clients are set to match. SHA1 is the default for OpenVPN.

Hardware Crypto No Hardware Crypto Acceleration

Tunnel Settings

IPv4 Tunnel Network 10.4.10.0/30
This is the IPv4 virtual network used for private communications between this server and client hosts expressed using CIDR (e.g. 10.0.8.0/24). The first network address will be assigned to the server virtual interface. The remaining network addresses can optionally be assigned to connecting clients (see Address Pool).

IPv6 Tunnel Network
This is the IPv6 virtual network used for private communications between this server and client hosts expressed using CIDR (e.g. fe80::/54). The first network address will be assigned to the server virtual interface. The remaining network addresses can optionally be assigned to connecting clients (see Address Pool).

IPv4 Remote network(s) 10.3.2.0/24
IPv4 networks that will be routed through the tunnel, so that a site-to-site VPN can be established without manually changing the routing tables. Expressed as a comma-separated list of one or more CIDR ranges. If this is a site-to-site VPN, enter the remote LAN/s here. May be left blank for non site-to-site VPN.

IPv6 Remote network(s)
These are the IPv6 networks that will be routed through the tunnel, so that a site-to-site VPN can be established without manually changing the routing tables. Expressed as a comma-separated list of one or more IP/PREFIX. If this is a site-to-site VPN, enter the remote LAN/s here. May be left blank for non site-to-site VPN.

Concurrent connections 1
Specify the maximum number of clients allowed to concurrently connect to this server.

Compression Enabled with Adaptive Compression
Compress tunnel packets using the LZO algorithm. Adaptive compression will dynamically disable compression for a period of time if OpenVPN detects that the data in the packets is not being compressed efficiently.

Type-of-Service Set the TOS IP header value of tunnel packets to match the encapsulated packet value.

Duplicate Connection Allow multiple concurrent connections from clients using the same Common Name.
(This is not generally recommended, but may be needed for some scenarios.)

Disable IPv6 Don't forward IPv6 traffic.

Advanced Configuration

Custom options
Enter any additional options to add to the OpenVPN server configuration here, separated by semicolon.
EXAMPLE: push "route 10.0.0.0 255.255.255.0"

Verbosity level default
Each level shows all info from the previous levels. Level 3 is recommended for a good summary of what's happening without being swamped by output.
None: Only fatal errors
Default through 4: Normal usage range
5: Output R and W characters to the console for each packet read and write. Uppercase is used for TCP/UDP packets and lowercase is used for TUN/TAP packets.
6-11: Debug info range

Save

pfSense is © 2004 - 2017 by Rubicon Communications, LLC (Netgate) All Rights Reserved. [View license](#)

- In the **'General Information'**-section:

^ Setting ^ Value ^



You should now be forwarded to the list with your configured OpenVPN servers under 'VPN - OpenVPN' on the 'Servers'-tab

From:
<https://wiki.nanoscopic.de/> - nanoscopic wiki

Permanent link:
<https://wiki.nanoscopic.de/doku.php/pages/howtos/pfsense/simple-site-to-site-vpn-with-pfsense-and-openvpn?rev=1615742899>

Last update: **2021/03/14 17:28**

